
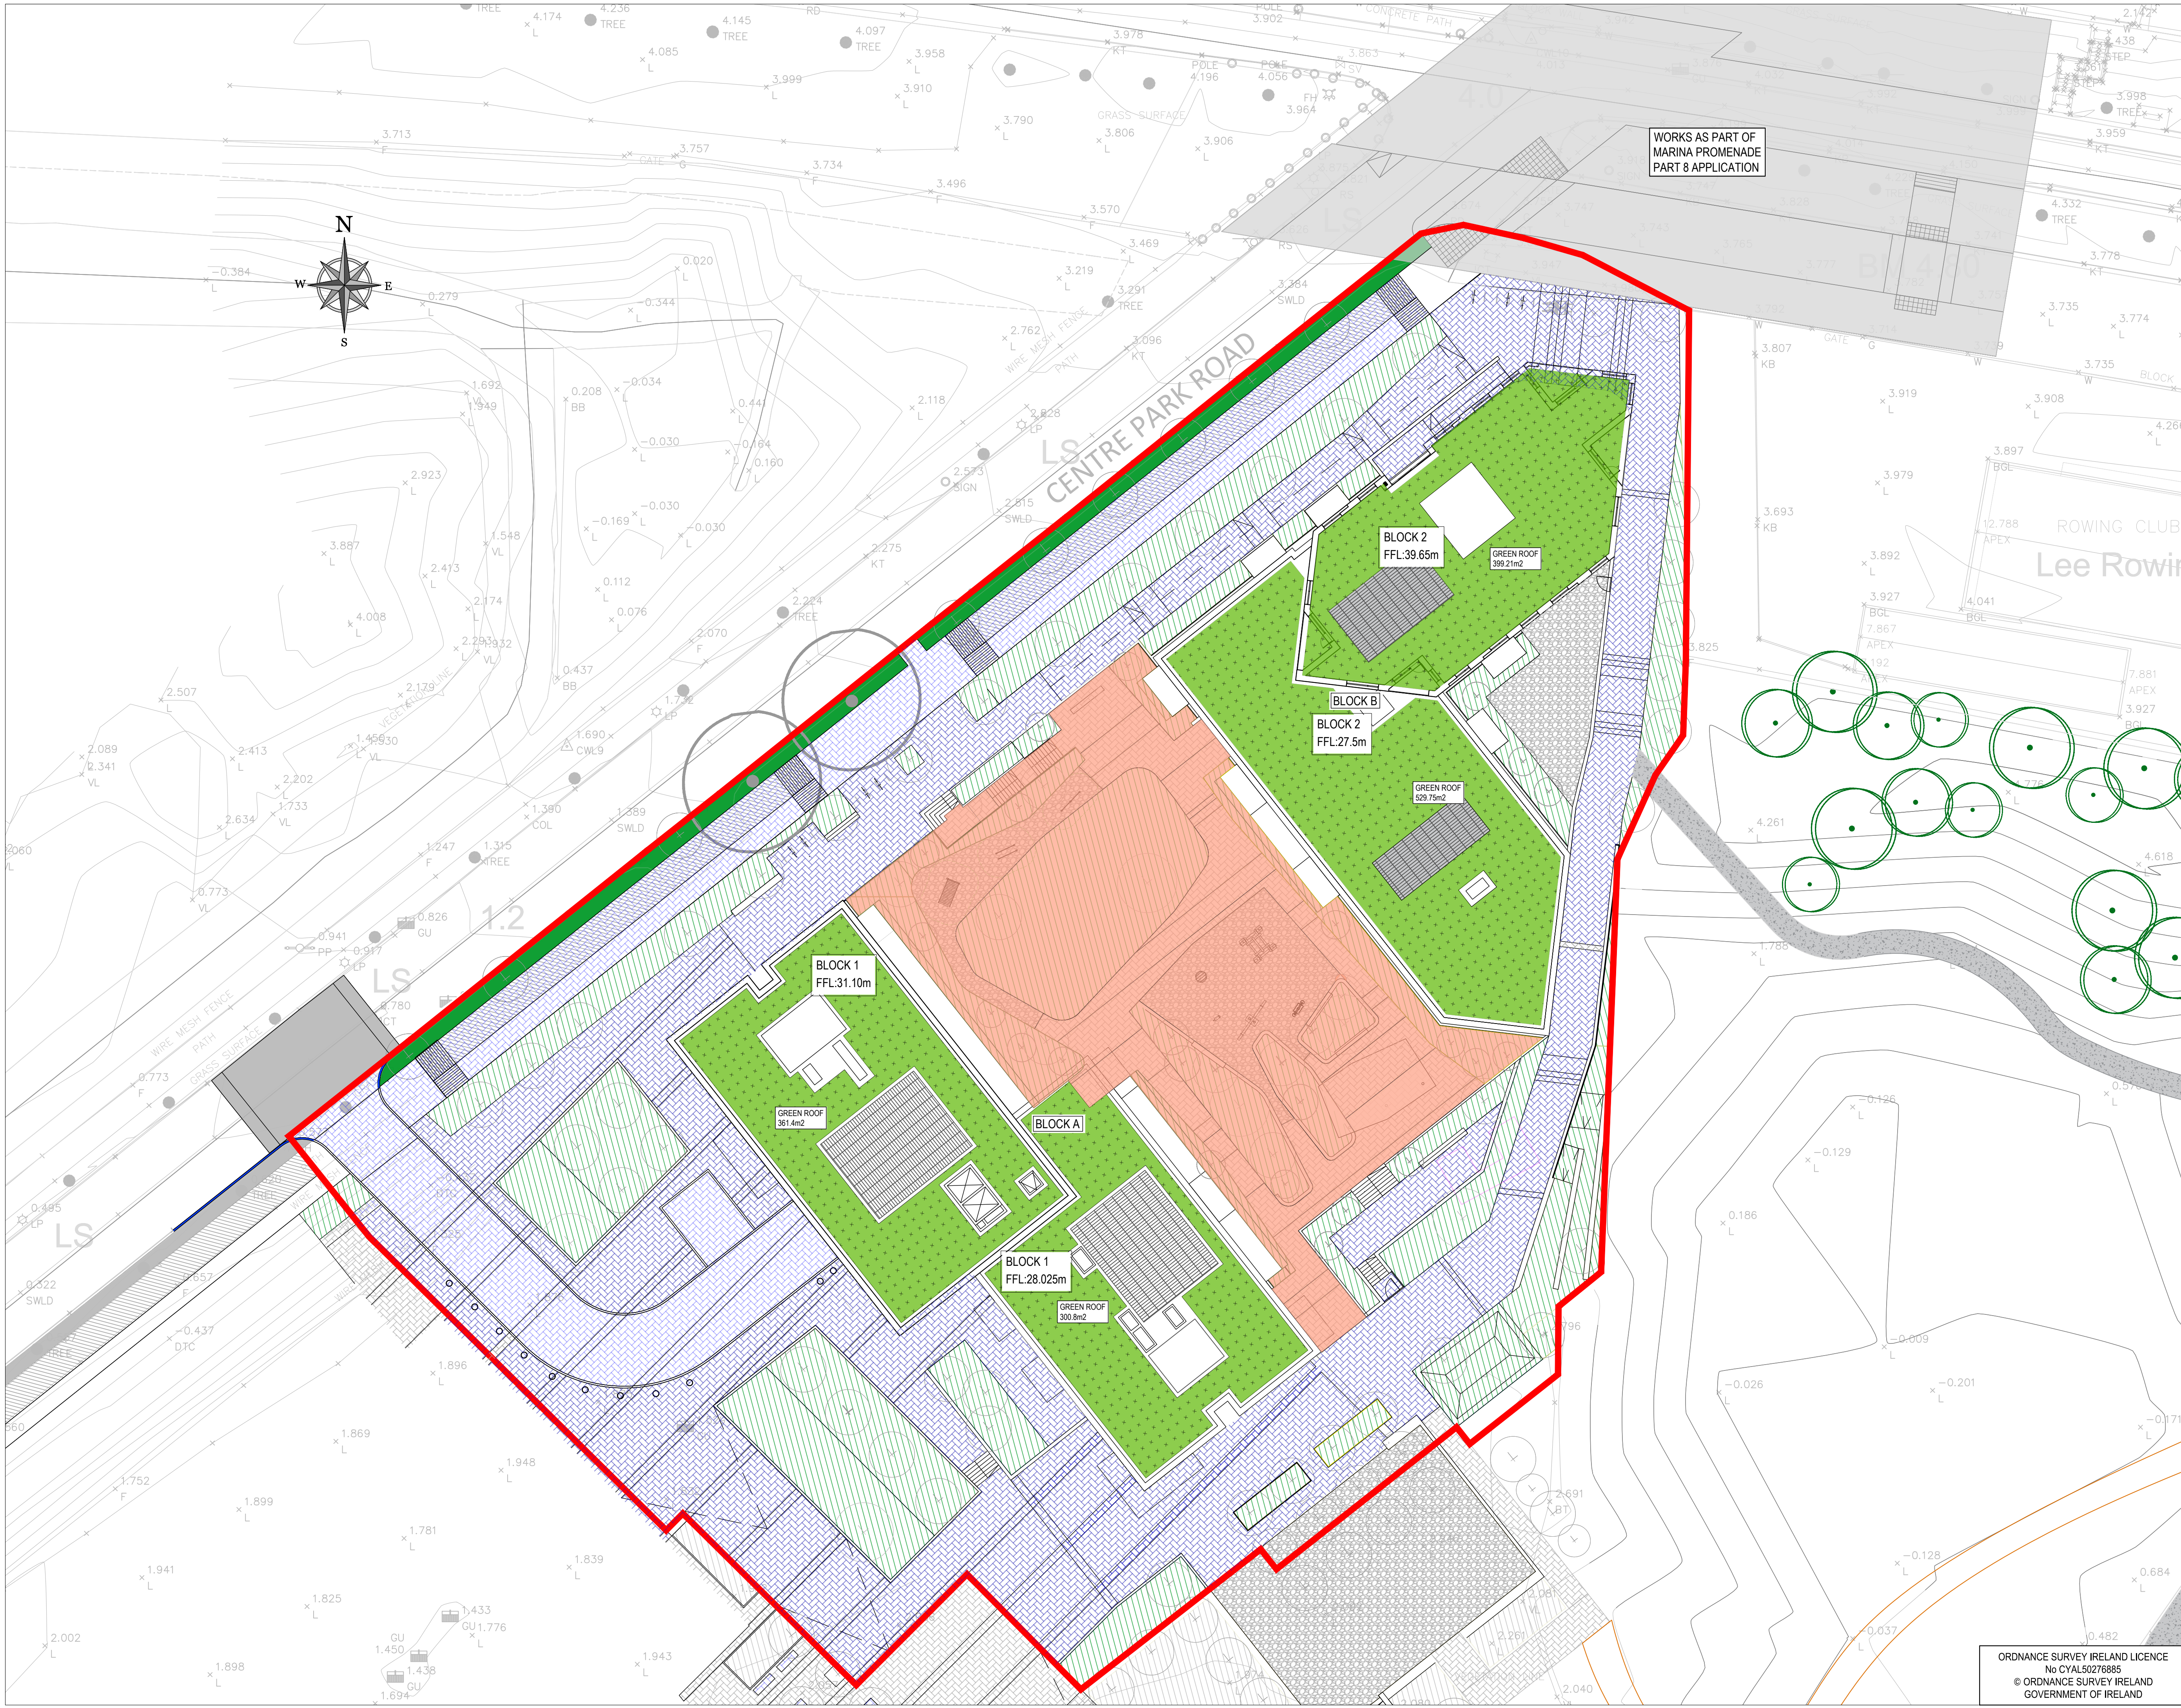


WORKS AS PART OF
MARINA PROMENADE
PART 8 APPLICATION

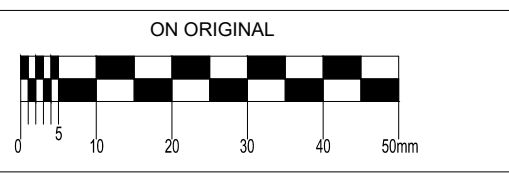

© COPYRIGHT OF THIS DRAWING IS RESERVED BY DBFL CONSULTING ENGINEERS. NO PART SHALL BE REPRODUCED OR TRANSMITTED WITHOUT THEIR WRITTEN PERMISSION.

NO CHANGES OF WHATSOEVER NATURE ARE TO BE MADE TO ANY DETAILS SET OUT OR CONTAINED IN ANY DBFL SPECIFICATIONS OR DRAWINGS UNLESS THE EXPRESS CONSENT HAS BEEN OBTAINED IN ADVANCE, IN WRITING, FROM DBFL.

- NOTES:
- GENERAL NOTES:
1. ALL WORKS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE WORKS REQUIREMENTS.
 2. ALL DIMENSIONS IN METRES UNLESS SPECIFIED OTHERWISE.
 3. ALL CO-ORDINATES ARE TO IRISH TRANSVERSE MERCATOR.
 4. ALL LEVELS ARE TO ORDNANCE DATUM (MALIN HEAD).
 5. ALL TEMPORARY TRAFFIC & OPERATIONS MANAGEMENT SHALL COMPLY FULLY WITH THE WORKS REQUIREMENTS.
 6. THE CONTRACTOR MUST LAISE DIRECTLY WITH LOCAL AUTHORITY DEPARTMENTS AS DIRECTED IN THE WORKS REQUIREMENTS.
 7. ALL VEHICULAR & PEDESTRIAN, CYCLE & PRIVATE ACCESS ROUTES WITHIN AND SURROUNDING THE WORKS EXTENTS MUST BE MAINTAINED THROUGHOUT THE WORKS IN ACCORDANCE WITH THE CONTRACTORS APPROVED TEMPORARY TRAFFIC & OPERATIONS MANAGEMENT PLAN.

- DRAWING SPECIFIC NOTES:
1. ALL DRAWINGS TO BE CHECKED BY CONTRACTOR ON SITE AND ENGINEER INFORMED OF DISCREPANCIES BEFORE WORK COMMENCES.
 2. CONTRACTOR SHALL SATISFY HIMSELF AS TO THE ACCURACY OF EXISTING DRAINAGE LEVELS & SERVICES ON SITE PRIOR TO COMMENCEMENT OF WORKS ON SITE.
 3. ALL WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH THE NRA SPECIFICATION FOR ROAD WORKS UNLESS NOTED OTHERWISE.
 4. MANHOLE COVER LEVELS ARE TO CONFORM WITH FINISHED ROAD AND PATH LEVELS.
 5. ALL DRAINAGE TO BE AS PER THE LOCAL AUTHORITY CODE OF PRACTICE FOR DRAINAGE WORKS, LOCAL AUTHORITY & IRISH WATER REQUIREMENTS.
 6. ALL EXTERNAL COLLECTOR DRAINS TO BE MINIMUM 150 mm DIA.
 7. ALL FOUL SEWERS TO BE UPVC TO EN1401.
 8. ALL SURFACE WATER SEWERS TO BE CLASS H CONCRETE TO EN1916 & IS 6204.
 9. THIS DRAWING IS BASED ON TOPO SURVEY BY MURPHY SURVEY LK, DATED 13/04/2016.
 10. CONTRACTOR SHALL INSPECT THE ROUTE & CONFIRM LOCATIONS OF ALL TREES, FEATURES, ENTRANCES & ASPECTS IMPACTING CONSTRUCTION OF THE WORKS.
 11. GREEN ROOFS SHALL BE PROVIDED WITH A 1m WIDE GRAVEL FIRE BREAK EVERY 40m.
 12. GRAVEL STRIPS MUST BE PROVIDED AROUND ALL STRUCTURES PENETRATING THE ROOF.

- LEGEND
- SITE BOUNDARY
 - GREEN ROOF
 - HARDSTANDING ROOF
 - PLANTED AND GRASSED LANDSCAPING AREAS
 - IMPERMEABLE PAVING DRAINING TO SUDS
 - PLANTED AND GRASSED LANDSCAPING AREAS IN ROAD VERGE
 - GRAVEL SURFACE
 - PERMEABLE PODIUM

0	21-06-24	ISSUED FOR SECTION 32B	BS	NJF
rev	date	description	by	chkd.
purpose		acceptance		
P1 - INFORMATION		S - ISSUED		

DBFL Consulting Engineers
Civil, Structural & Transportation Engineering
www.dbfl.ie

DUBLIN OFFICE: Ormond House, Upper Ormond Quay, Dublin 7, D07 W0Y4
PHONE: +353 1 400 4000
CORK OFFICE: 14 South Mall, Cork, T12 CT9H
PHONE: +353 21 2034338
WATERFORD OFFICE: Suite 20 The Atrium, Marlboro Gate, Canalside, Waterford, X51 W028
PHONE: +353 51 309 500
GALWAY OFFICE: Orion House, 7 Eyre Square, Galway, H91 YNCS
PHONE: +353 91 33 55 00

project ref:

FORMER FORD SITE

drawing title:

SURFACE WATER STRATEGY PLAN

client:

MARINA QUARTER LTD

designed by	author	scale	sheet size
MLC	GS	1:250	A1
drawing no.	revision		
240002-X-91-200-DTM-DR-DBFL-CE-1310	0		

ORDNANCE SURVEY IRELAND LICENCE
No CYAL50276885
© ORDNANCE SURVEY IRELAND
GOVERNMENT OF IRELAND