



Copyright: All creative artwork, landscape symbology, text, legends, specifications, descriptions and illustrations used in our drawings and reports are the intellectual property of **ait** urbanism + landscape ltd. and are not to be reproduced by others.

NOTES on railings:


- Top and bottom rail formed from 50 x 12 mm flat bar.
- Vertical bars to be 16mm round section bars.
- Frame and bars to be welded.
- Railings supported on 80 x 80 x 5mm SHS steel post.
- Posts to be secured with a base plate. Post to be welded to base plate.
- Base plates to be secured with 4no. M12 expanding bolts per post.
- All joints to be welded and opes pre drilled prior to Galvanising.
- All mild steel to be galvanised and powder coated to a select RAL..
- All bolts and fixings to be galvanised.

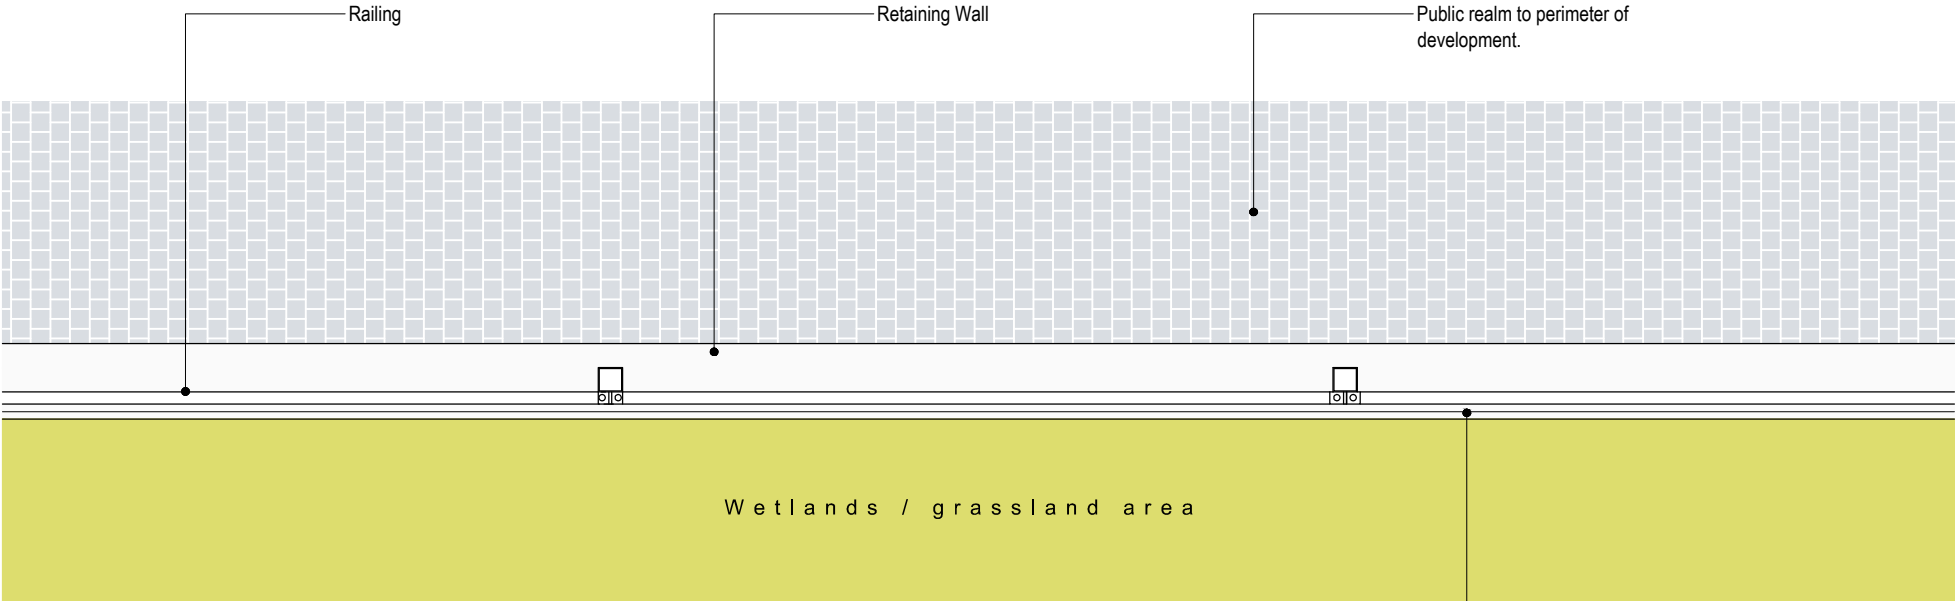

Plan

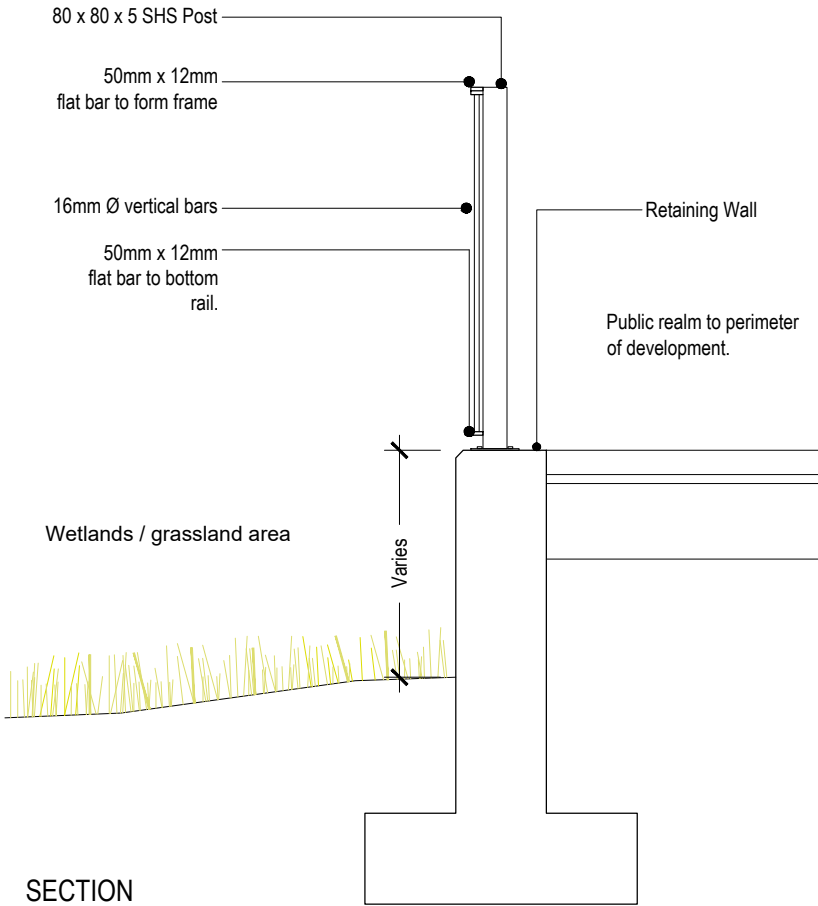

SECTION

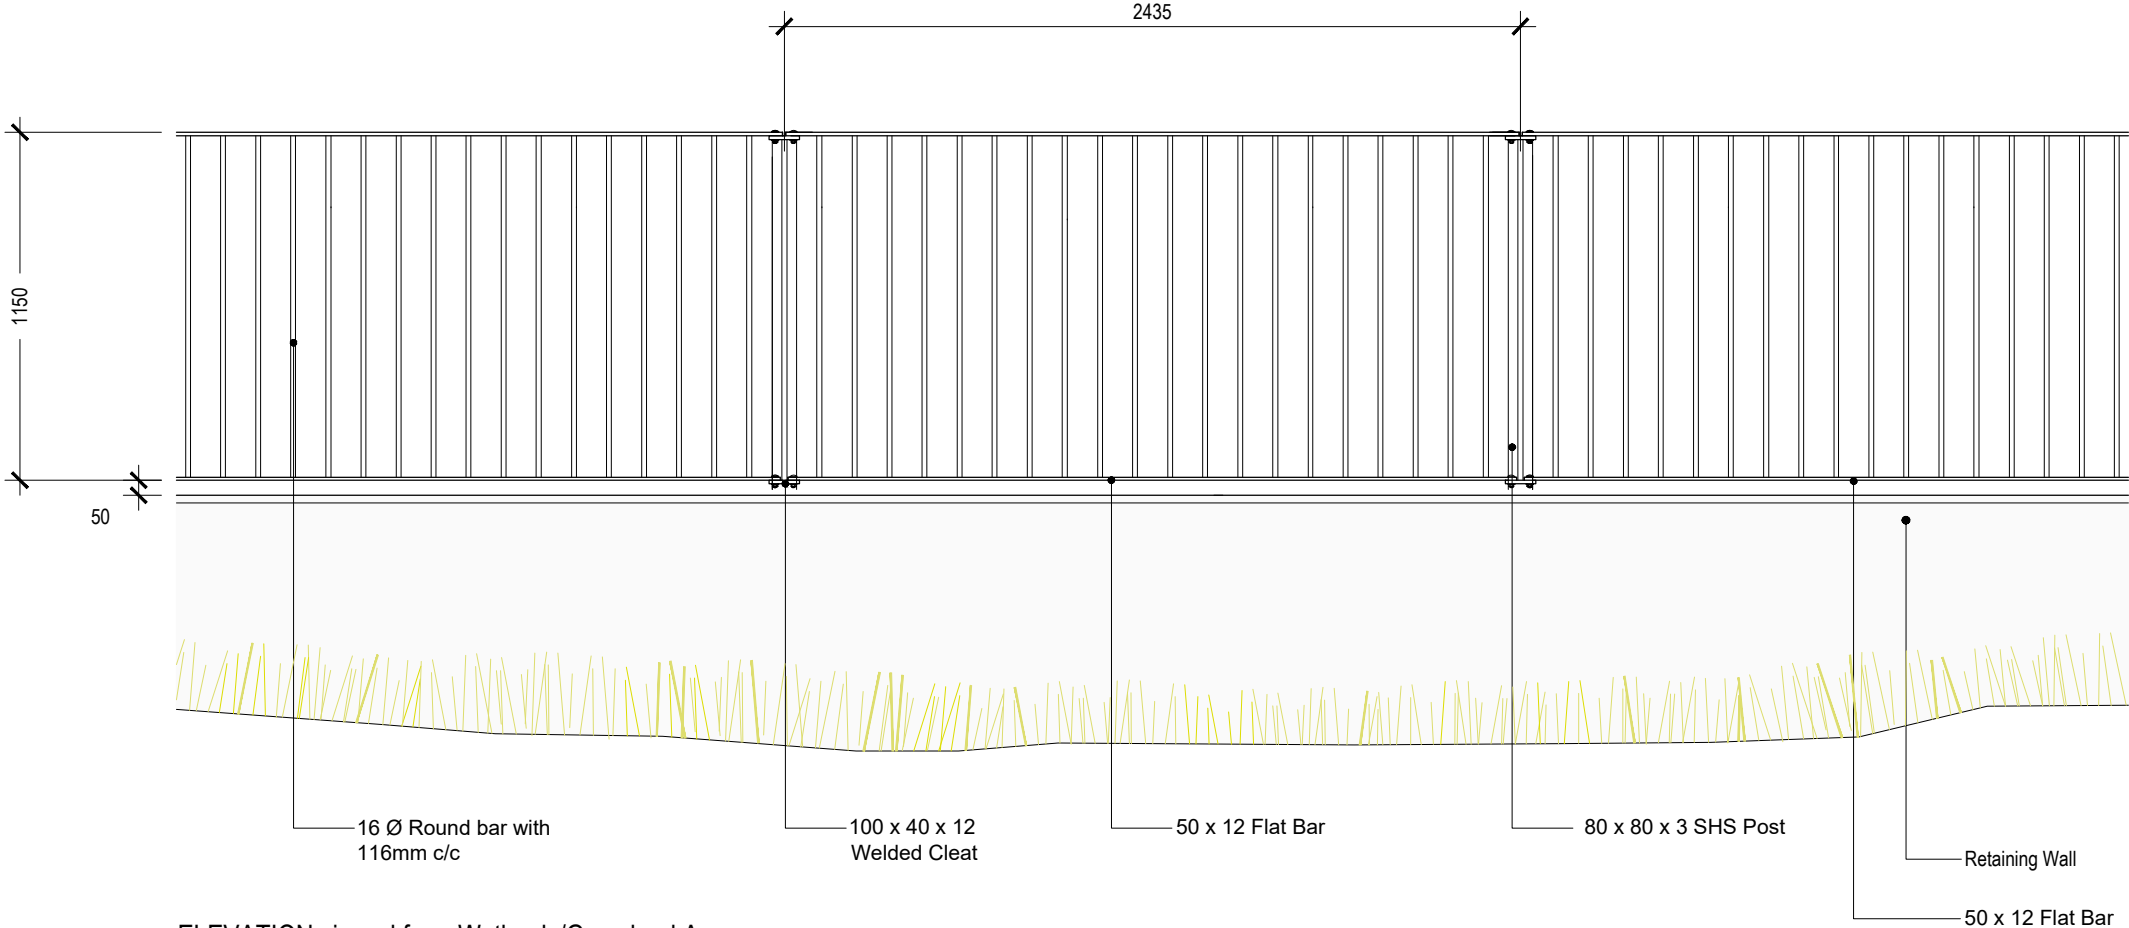

ELEVATION viewed from Wetlands/Grassland Area

This drawing is the copyright of **ait** urbanism + landscape. Unless otherwise stated all dimensions are in millimetres. Where dimensions are not given, drawings must not be scaled and the matter must be referred to the Landscape Architect. If the drawing includes conflicting details/dimensions the matter must be referred to the Landscape Architect. All dimensions must be checked on site. The Landscape Architect must be informed, by the Contractor, of any discrepancies before work proceeds.

NOTES:

DATE	REV.	DESCRIPTION	DRAWN BY:	CHECKED BY:
-	-	-	-	-



3rd Floor Newmarket House,
Newmarket Square,
Dublin 8
Ireland
t: + 353 86 1739522
www.ait-place.ie

ISSUE STATUS:

Planning

DRAWING NO:
24C02-DR-5001

REVISION:

-

CLIENT: Marina Quarter Ltd.

PROJECT: Ford Site Cork

DRAWING: Railing Detail

DRAWN BY:
DMacD

1st ISSUE:
16.10.2024

PROJECT NO:
24C02

SCALE:
1:25

SHEET SIZE:
A3

CHECKED BY:
DMacD